

SPX650

LITHIUM BATTERY



Lifting capacity

5000 kg



Max tip height

23,7 m



L x W x H

Dimensions (l x w x h)

4480 x 1010 x 2080 mm



Powered by

Lithium battery



Weight

5800 kg



EN [m - kg]



FEATURES



STRENGTH AND PRECISION

- Unmanned structure design
- Engineered to maximise stiffness and load stability
- Dynamic load sway control for accurate load handling
- Automatic speed adjustment to ensure smooth and precise maneuvers
- Automatic movement limitation to maximise safety

LITHIUM BATTERY POWERED

- Indoor operation, emission free
- Maintenance free
- Runtime over 1 workday
- On board 110/230V charger: 0-80% in 5h 30' (110V: 7h 30')
- External 400V fast charger: 0-80% in 2h 15'
- Adjustable charging current
- Work while charging



ENDLESS CRANE CONFIGURATIONS

- Hook** - Fast hook/winch switch
- Winch**: 80 m rope
- 800 kg capacity single fall / 4800 kg 6 falls
- Hook block stowing
- Hydraulic jib** - 1200 kg SWL
- Hook or winch
- +15/-80° angle, up to 6,0 m length
- Unique self-installation system
- Tools**: Plug&Play connection




PICK & CARRY

- Up to 800 kg lifting capacity
- 360° turret rotation
- Extendable crawler for improved driving



SAFETY SYSTEMS

- Full LMI system
- Anti crash system
- Feedback on display

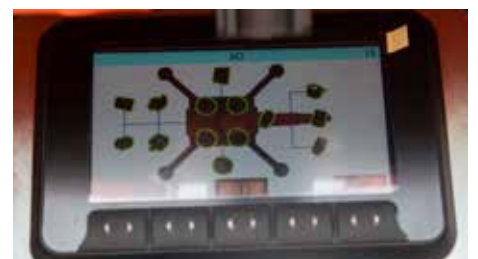

J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units





WIDE STABILITY SOLUTIONS


- Optimal lifting capacity/footprint ratio
- Stepless outriggers rotation 0°/70°
- Stepless telescopic outriggers extension
- Adjustable outriggers height
- Self-levelling

EASY TRANSPORT

- Precise and easy to drive
- Non-marking white tracks for indoor*



DIMENSIONS (mm)


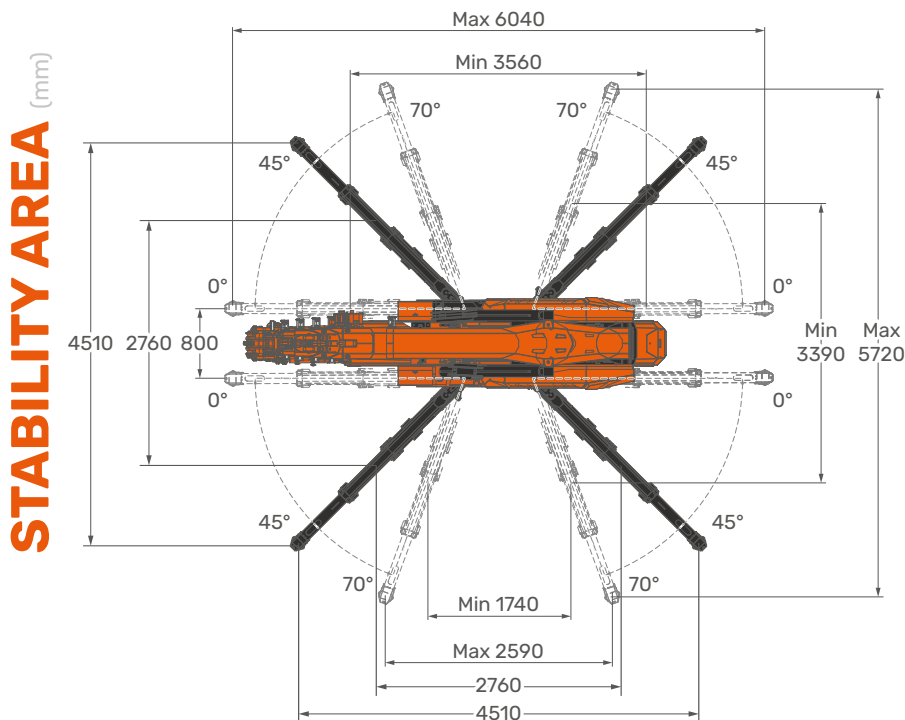


COMPACT FOOTPRINT

- Infinite outriggers configurations
- Self-levelling



LOAD CHARTS

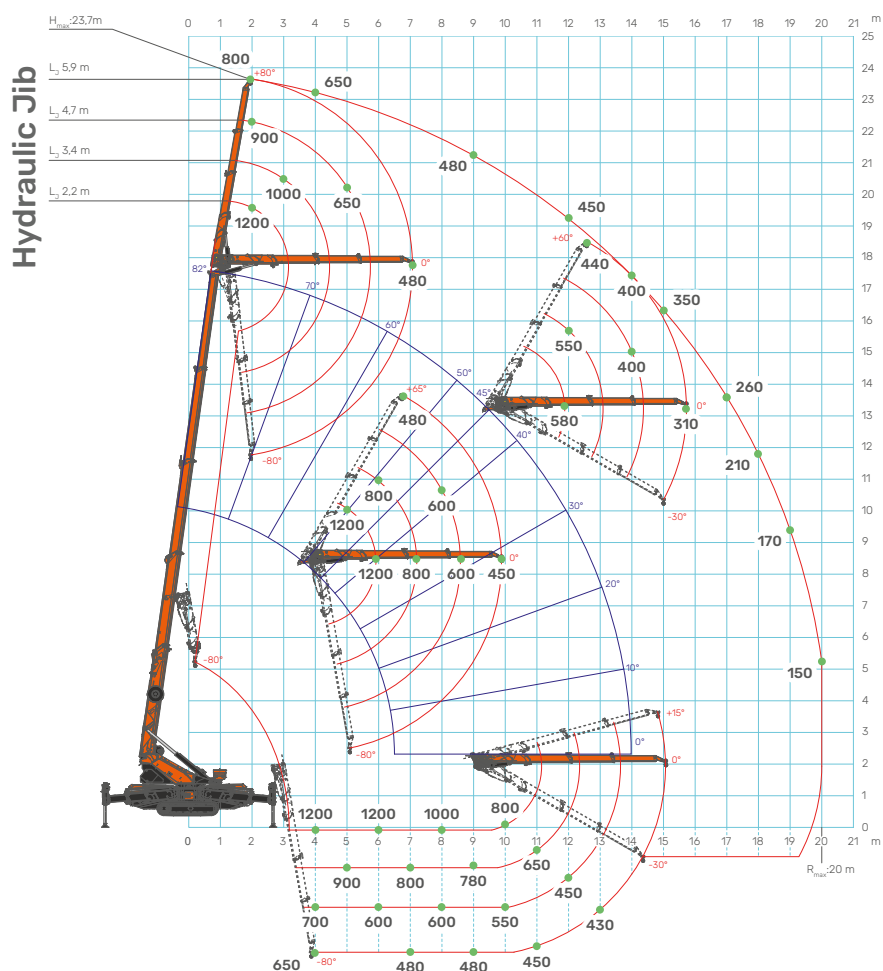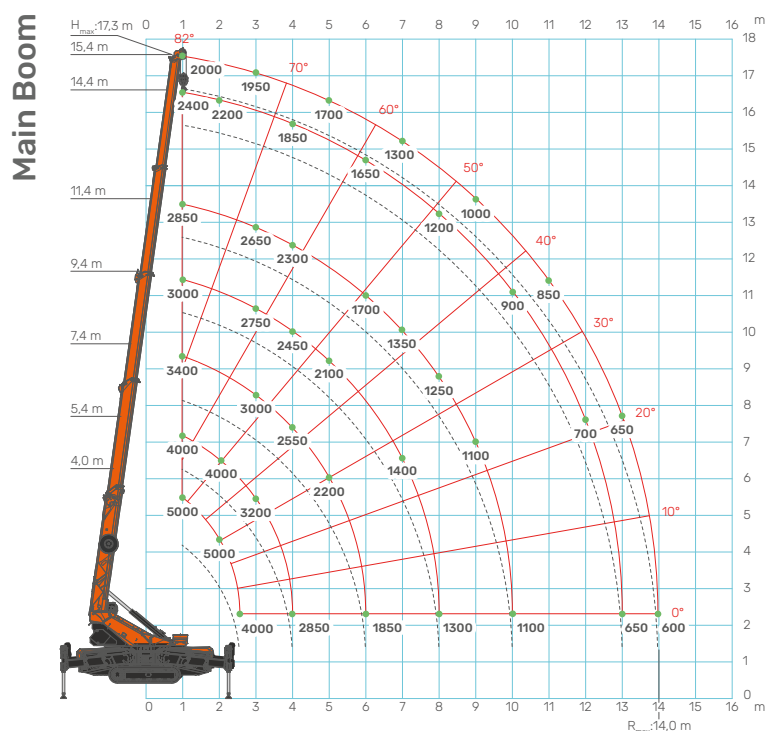

TOOLS AVAILABLE

HYDRAULIC JIB

WLL 1200 kg



SEARCHER HOOK

WLL 2000 kg



BEAM/PIPE MANIPULATOR

WLL 500 kg - JIB500GR



GLASS MANIPULATOR

WLL 800 kg - JVM800R



SPX650
LITHIUM BATTERY

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.