

SPX650

DIESEL BI-ENERGY



Lifting capacity

5000 kg



Max tip height

23,7 m



L x W x H

Dimensions (l x w x h)

4480 x 1010 x 2080 mm



Powered by

Bi-Energy

Diesel + Electric Power Pack



Weight

5800 kg



EN [m - kg]



FEATURES



STRENGTH AND PRECISION

- Unmanned structure design
- Engineered to maximise stiffness and load stability
- Dynamic load sway control for accurate load handling
- Automatic speed adjustment to ensure smooth and precise maneuvers
- Automatic movement limitation to maximise safety

DIESEL BI-ENERGY POWERED

Diesel engine

- 16 kW Kubota diesel engine
- Low consumption, high reliability

Electric Power Pack *

- On board motor: 100% electric operation
- Emission-free and noise-free indoor operation
- Threephase motors for every Country



ENDLESS CRANE CONFIGURATIONS

Hook - Fast hook/winch switch

Winch: 80 m rope

- 800 kg capacity single fall / 4800 kg 6 falls
- Hook block stowing

Hydraulic jib - 1200 kg SWL

- Hook or winch
- +15/-80° angle, up to 6,0 m length
- Unique self-installation system

Tools: Plug&Play connection




PICK & CARRY

- Up to 800 kg lifting capacity
- 360° turrett rotation
- Extendable crawler for improved driving



SAFETY SYSTEMS

- Full LMI system
- Anti crash system
- Feedback on display

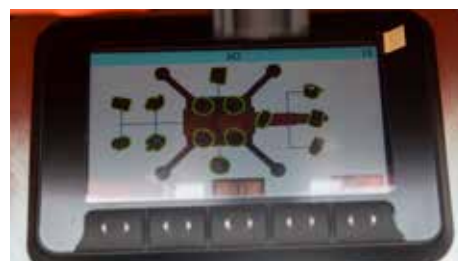

J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units



*Optional



WIDE STABILITY SOLUTIONS


- Optimal lifting capacity/footprint ratio
- Stepless outriggers rotation 0°/70°
- Stepless telescopic outriggers extension
- Adjustable outriggers height
- Self-levelling

EASY TRANSPORT

- Precise and easy to drive
- Non-marking white tracks for indoor*



DIMENSIONS (mm)


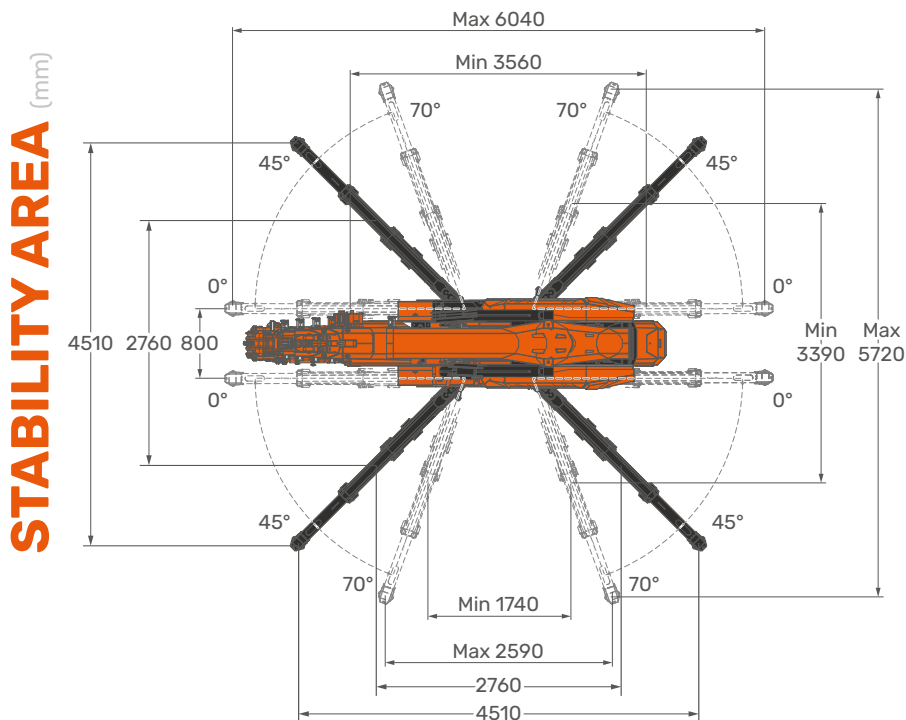


COMPACT FOOTPRINT

- Infinite outriggers configurations
- Self-levelling



LOAD CHARTS

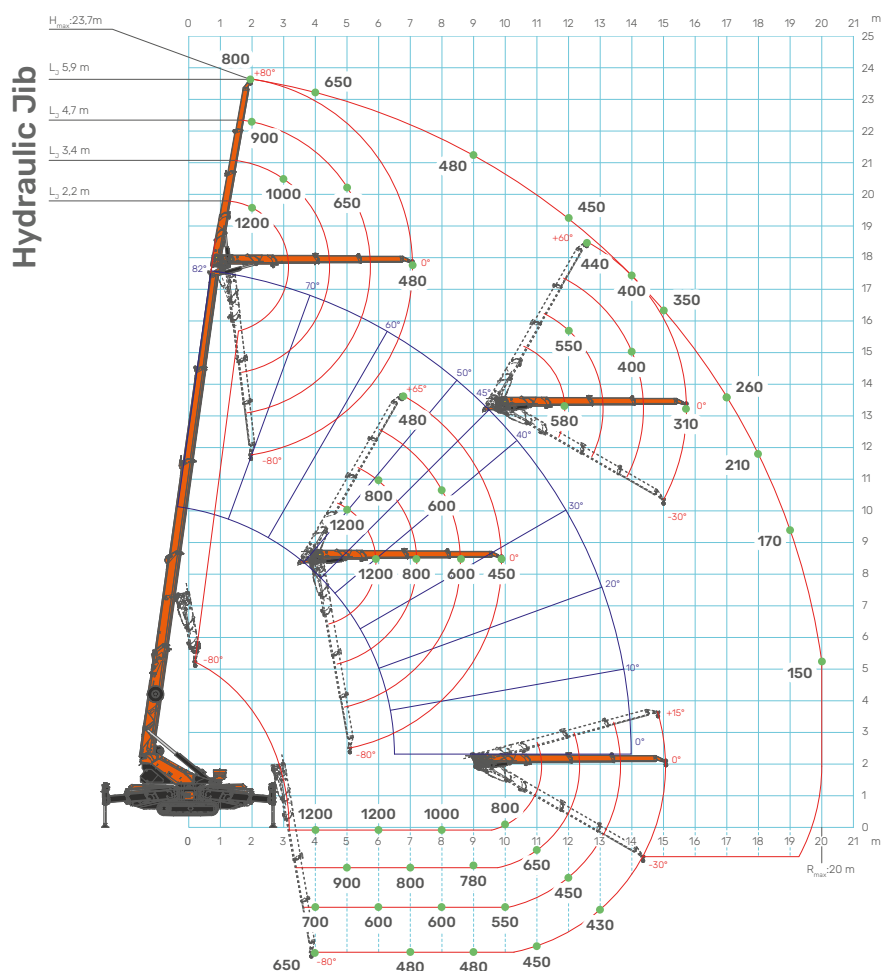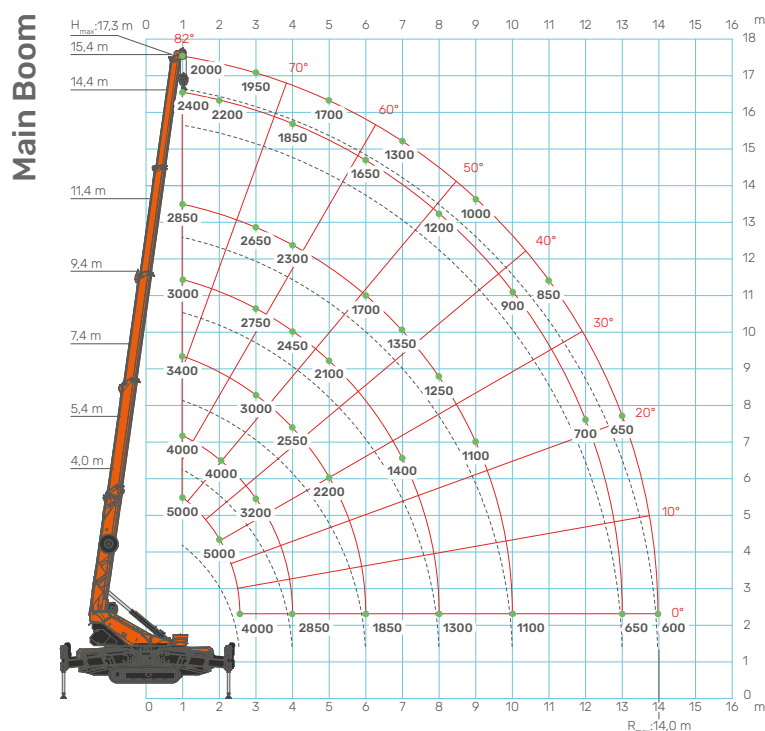

TOOLS AVAILABLE

HYDRAULIC JIB

WLL 1200 kg



SEARCHER HOOK

WLL 2000 kg



BEAM/PIPE MANIPULATOR

WLL 500 kg - JIB500GR



GLASS MANIPULATOR

WLL 800 kg - JVM800R



SPX650
DIESEL BI-ENERGY

Jekko s.r.l. • info@jekko.it • www.jekko-cranes.com

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.